




FRONT VIEW

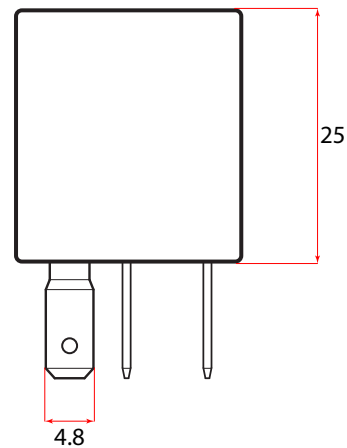


SIDE VIEW 1

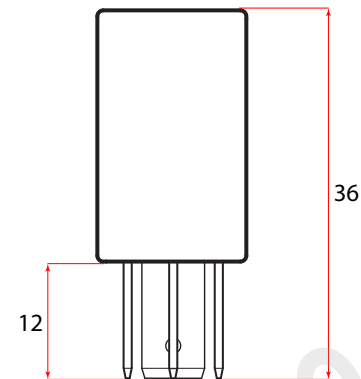


SIDE VIEW 2

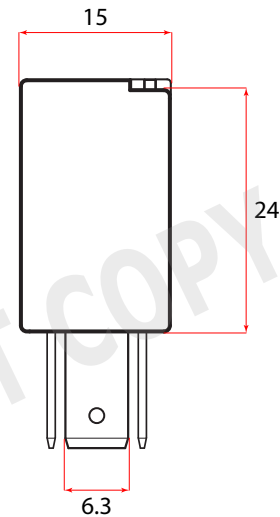


REAR VIEW

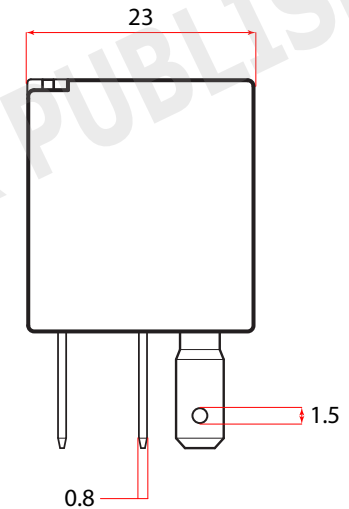

PIN LAYOUT



CIRCUIT DIAGRAM



+ / - 5% All Dimensions In MM

Part Number	13-011
Voltage	12V
Continuous Load (Open / Closed)	40A / 30A
Peak Load (Open / Closed)	80A / 60A
Operation Life	100,000 Operations at 30 Amps
Contact Material	Silver Alloy
Output Contact	2 (No 87 & 87a)
Terminal Sizes	2 x 6.3mm & 3 x 4.8mm

Ambient Temperature	-40°C to +85°C
Case Material	PA66
Protection	Diode
Bracket Type	None



CurrentCare Ltd

Marlborough Works, Marlborough Road, Accrington, BB5 5BE

Tel: +44 (0) 1254 300 730 Fax: +44 (0) 1254 237432

e-mail: sales@currentcare.co.uk

© Copyright CurrentCare Ltd 2020

All Measurements And Specifications Are Accurate + / - 5%

Some Specifications May Vary / Change Without Prior Notice