




Chicago
Pneumatic

CP8854 & CP8854-2

Cordless impact wrench
Serie C

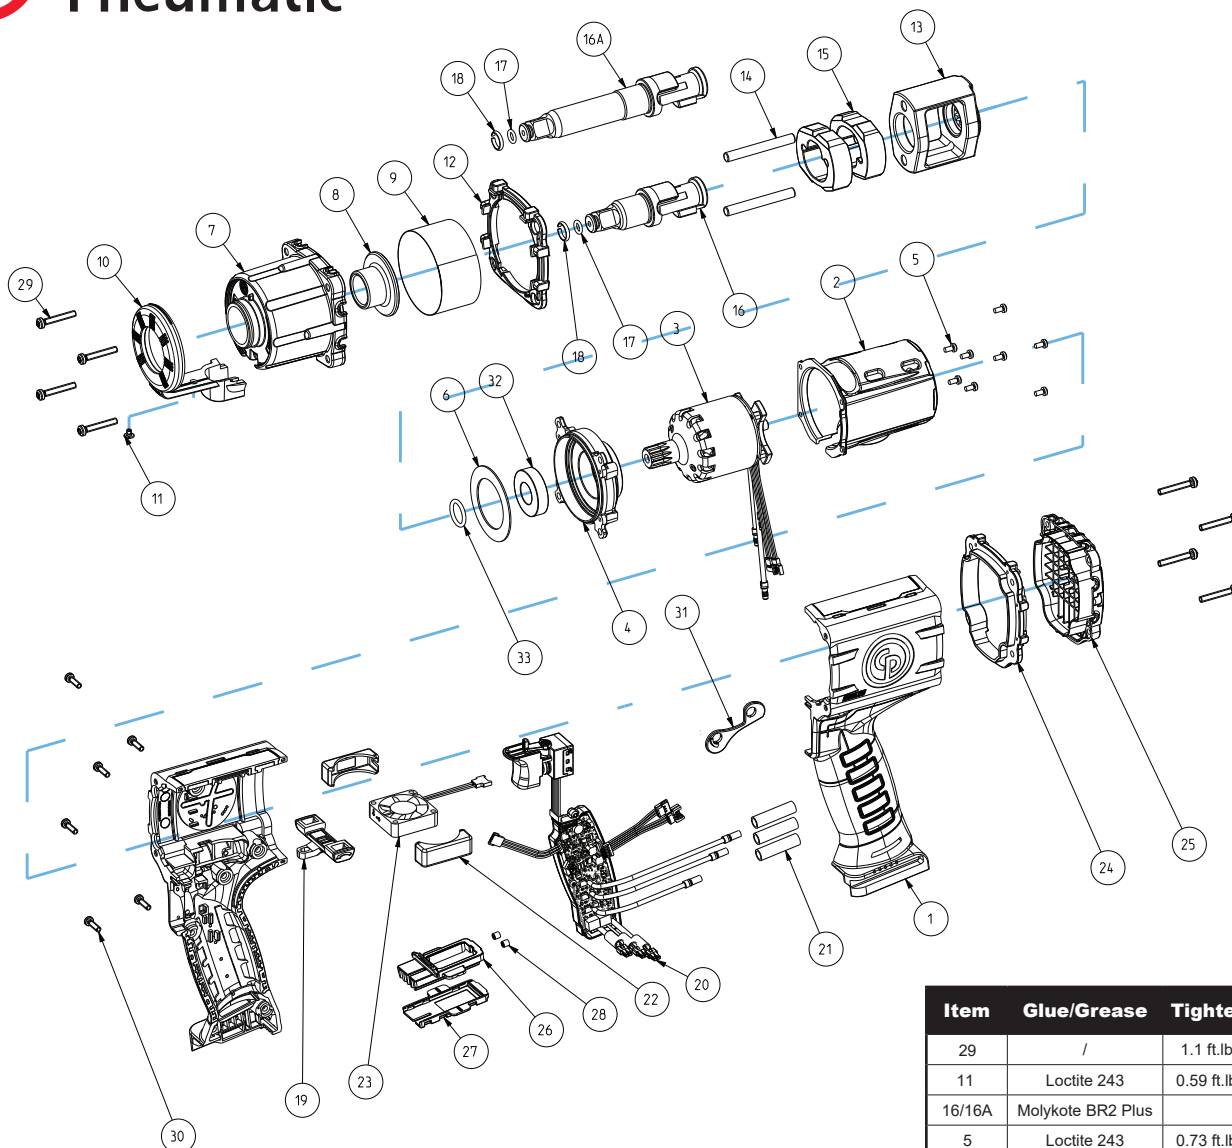

Item	Glue/Grease	Tightening torque	
29	/	1.1 ft.lbs	1.5 Nm
11	Loctite 243	0.59 ft.lbs	0.8 Nm
16/16A	Molykote BR2 Plus		
5	Loctite 243	0.73 ft.lbs	1 Nm
30	/	0.59 ft.lbs	0.8 Nm

Ref	CP Part No.	Description	Q'ty
A	8940171601	Socket Retainer Kit (Set of 5)	
18		Socket Retainer	1
17		O-Ring 5.8X1.9	1
B	8940176653	Clutch Housing Kit Assembled	
29		Self Tapping Screw 40X25 WN5452	4
11		M3x4 Torx Black	1
10		Clutch Housing Cover	1
8		Bushing	1
9		Steel Ring	1
C	8940176654	Motor Case Kit	
2		Motor Case	1
5		6-P Sock Screw	4
D	8940176655	Front Flange Kit	
4		Motor Front Flange	1
5		6-P Sock Screw	4
E	8940176656	Connector Kit	1
27		Connector Cover	1
26		Connector House	1
28		Clearance Block for Pcb	2
F	8940176657	Bumper Kit	1
12		Front Bumper	1
24		Rear Bumper	1
G	8940176658	Screw Kit	1
29		Self Tapping Screw 40X25 WN5452	8
11		M3x4 Torx Black	1
5		6-P Sock Screw	8
30		Self Tapping Screw 35X12 WN5452	6

Ref	CP Part No.	Description	Q'ty
16*	2050521363	Short Anvil Assembly for CP8854	1
18		Socket Retainer	1
17		O-Ring 5.8X1.9	1
16		Std Anvil 1/2"	1
16A*	2050526443	Long Anvil Assembly for CP8854-2	1
18		Socket Retainer	1
17		O-Ring 5.8X1.9	1
16A		Long Anvil 1/2"	1

3	8940177162	Motor	1
13	2050521143	Hammer frame	1
14	2050521123	Hammer pins (Set of 2)	1
15	2050521133	Hammer (Set of 2)	1
20	8940177163	PCB Drive assembly	1

	8940175914	Warning Label
	8940176366	Safety Information

Recommended Maintenance Tools

It is recommended to treat the battery tool contacts every 6 months with contact lubricant Electrolube: CG53A35SL

Recommended Accessories

Battery	Charger	CP8854 Boot Cover
CP18XP25	CP18-36CH	8940176685
8940176067	8940176069	