
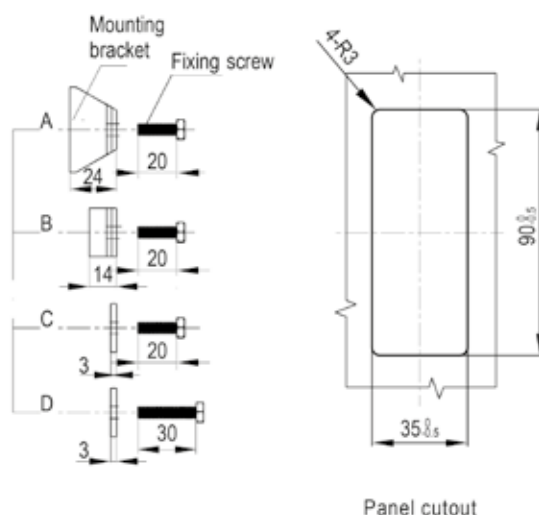


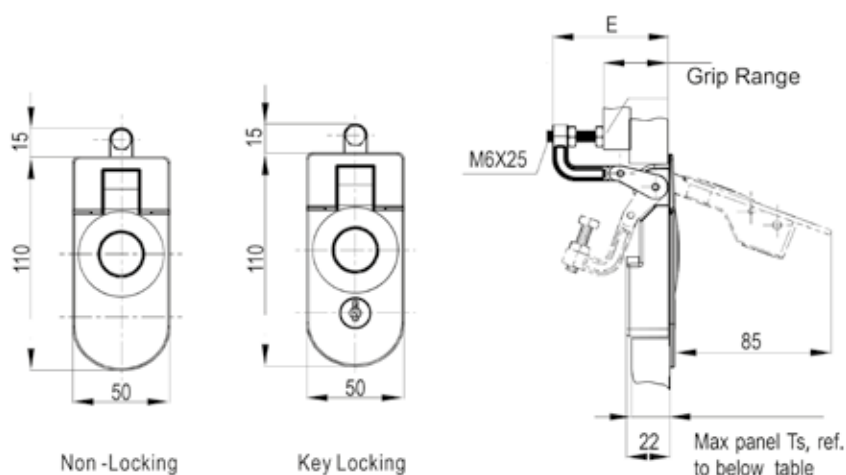

Zinc die handle, housing and trigger. Mild steel zinc plated fixing components. Rubber seal gasket.

Mounting Bracket	Panel Thickness		Grip Range		E						
	Min	Max	Min	Max		Non-Locking	CH751 Key Locking With Shutter	CH751 Key Locking	Tooling Secured	Hexagon Female 4.5mm	8.5mm Square Railway Standard
A	1	11	1	14	29	1245-114-201	1245-214-201	1245-314-201	1245-414-201	1245-914-201	1245-614-201
B	11	21				1245-114-202	1245-214-202	1245-314-202	1245-414-202	1245-914-202	1245-614-202
A	1	11	14	29	44	1245-129-201	1245-229-201	1245-329-201	1245-429-201	1245-929-201	1245-629-201
B	11	21				1245-129-202	1245-229-202	1245-329-202	1245-429-202	1245-929-202	1245-629-202
C	21	31				1245-129-203	1245-229-203	1245-329-203	1245-429-203	1245-929-203	1245-629-203
A	1	11	29	45	60	1245-145-201	1245-245-201	1245-345-201	1245-445-201	1245-945-201	1245-645-201
B	11	21				1245-145-202	1245-245-202	1245-345-202	1245-445-202	1245-945-202	1245-645-202
C	21	31				1245-145-203	1245-245-203	1245-345-203	1245-445-203	1245-945-203	1245-645-203
D	31	41				1245-145-204	1245-245-204	1245-345-204	1245-445-204	1245-945-204	1245-645-204
A	1	11	45	57	72	1245-157-201	1245-257-201	1245-357-201	1245-457-201	1245-957-201	1245-657-201
B	11	21				1245-157-202	1245-257-202	1245-357-202	1245-457-202	1245-957-202	1245-657-202
C	21	31				1245-157-203	1245-257-203	1245-357-203	1245-457-203	1245-957-203	1245-657-203
D	31	41				1245-157-204	1245-257-204	1245-357-204	1245-457-204	1245-957-204	1245-657-204

Remark 1. Keyed KEY333 on request. 2. Key different on request