



EXTENSION SPRINGS

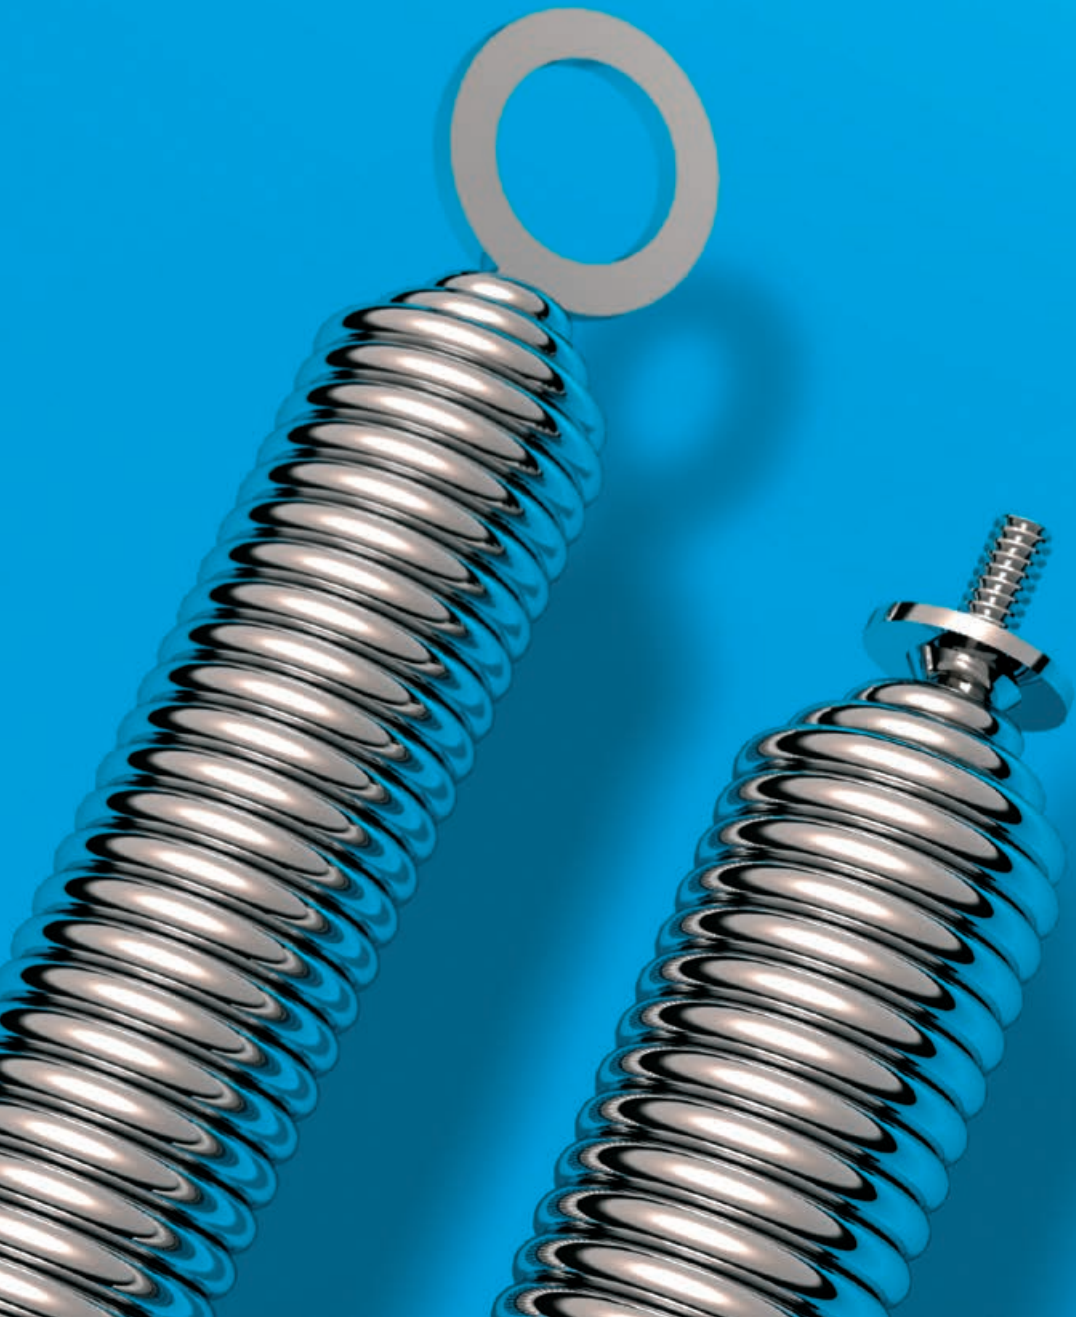

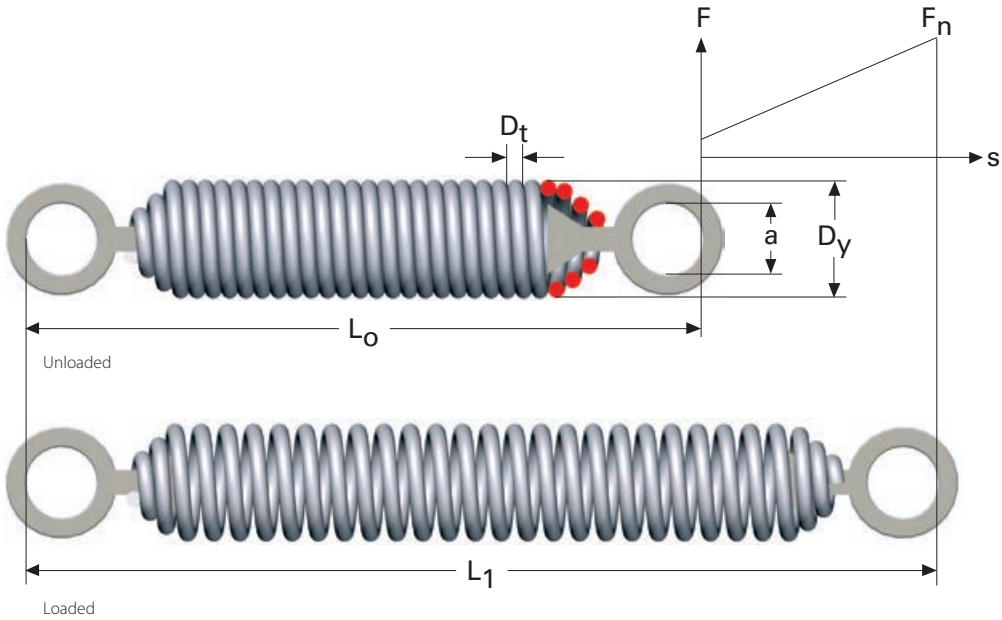

Extension springs with turnable, extra strong loops for high loads

In order to be able to use the spring to its maximum, without running the risk of loop breaks, you can use this series of extension springs with hardened loops, which have tapered ends. The loops are loose, and can therefore be turned to any position.

All dimensions are in mm

D_t = Wire diameter

D_y = Outer diameter

L_o = Free length

n_v = No of active coils

R = Rate

F_o = Initial force, the force required before the spring starts to extend

L_n = Maximum permitted extended length for dynamic load

F_n = Spring force in Newtons at $L_n = s \times R + F_o$

s = Deflection $L_n - L_o$

a = Inner diameter of loop

Material: EN 10270-1-SH

Max load length and temperature

Maximum load length L_n applies for static or pseudo static loaded springs operating at temperature up to about 40°C. The relaxation, i.e. the power loss over time, will then stay within acceptable values for most applications. At higher operating temperatures or dynamic life demands, more than 10,000 cycles, the spring should not be loaded as far as L_n . Maximum permitted operating temperature of unalloyed spring steel EN10270-1-SH is about 120 °C.

Tolerances: see page 217

To calculate the spring force at a certain length, multiply the travel in mm by the rate (R) + the initial force (F_o).

1 kp = 9.80665 Newtons, 1 Newton = 0.10197 kp



EXTENSION SPRING

ESTL

D _t	D _y	L ₀	n _v	R	F ₀	L _n	a	Cat.no
2,5	17	110	22	5,9	34	153	12	3828
2,5	17	140	34	3,8	34	207	12	6350
2,5	17	170	46	2,8	34	260	12	3829
2,5	17	200	58	2,3	34	314	12	6351
2,5	17	230	70	1,9	34	367	12	3830
2,5	17	260	82	1,6	34	421	12	6352
2,5	20	110	22	3,4	29	175	12	6353
2,5	20	140	34	2,2	29	241	12	3831
2,5	20	170	46	1,6	29	307	12	6354
2,5	20	200	58	1,3	29	372	12	3832
2,5	20	230	70	1,1	29	438	12	6355
2,5	20	260	82	0,91	29	504	12	3833
2,5	24	110	22	1,8	23	213	12	3834
2,5	24	140	34	1,2	23	299	12	6356
2,5	24	170	46	0,87	23	385	12	3835
2,5	24	200	58	0,69	23	472	12	6357
2,5	24	230	70	0,57	23	558	12	3836
2,5	24	260	82	0,49	23	644	12	6358
3	18	120	21,5	11	49	155	12	3837
3	18	150	31,5	7,8	49	202	12	6463
3	18	180	42	5,8	49	249	12	3838
3	18	210	52	4,7	49	296	12	6360
3	18	240	61,5	4,0	49	341	12	3839
3	18	270	71,5	3,4	49	388	12	6361
3	23	120	21,5	4,8	41	187	12	6362
3	23	150	31,5	3,3	41	248	12	3840
3	23	180	42	2,5	41	311	12	6363
3	23	210	52	2,0	41	372	12	3841
3	23	240	61,5	1,7	41	432	12	6364
3	23	270	71,5	1,4	41	493	12	3842
3	28	120	21,5	2,5	34	229	12	3843
3	28	150	31,5	1,7	34	310	12	6365
3	28	180	42	1,3	34	393	12	3844
3	28	210	52	1,0	34	473	12	6366
3	28	240	61,5	0,86	34	551	12	3845
3	28	270	71,5	0,74	34	632	12	6367
3,5	22	140	20,5	12	64	183	15	5017
3,5	22	170	29	8,3	64	231	15	6368
3,5	22	200	37,5	6,4	64	278	15	3847
3,5	22	230	46	5,2	64	326	15	6369
3,5	22	260	55	4,4	64	375	15	3848
3,5	22	290	63	3,8	64	422	15	6370
3,5	27	140	20,5	5,7	55	213	15	6371
3,5	27	170	29	4,1	55	273	15	3849
3,5	27	200	37,5	3,1	55	333	15	6372
3,5	27	230	46	2,6	55	393	15	3850
3,5	27	260	55	2,1	55	455	15	6373
3,5	27	290	63	1,9	55	513	15	3851
3,5	32	140	20,5	3,2	46	251	15	3852
3,5	32	170	29	2,3	46	327	15	6467
3,5	32	200	37,5	1,8	46	402	15	3853
3,5	32	230	46	1,4	46	478	15	6375
3,5	32	260	55	1,2	46	557	15	3854
3,5	32	290	63	1,0	46	630	15	6376
4	24	150	20,5	16	83	193	15	3855
4	24	180	28	12	83	238	15	6377
4	24	210	35,5	9,2	83	284	15	3856
4	24	240	43	7,6	83	329	15	6378
4	24	270	50,5	6,5	83	375	15	3857
4	24	300	58	5,6	83	421	15	6379

D _t	D _y	L ₀	n _v	R	F ₀	L _n	a	Cat.no
4	30	150	20,5	7,2	68	226	15	6380
4	30	180	28	5,3	68	284	15	3858
4	30	210	35,5	4,2	68	342	15	6381
4	30	240	43	3,5	68	400	15	3859
4	30	270	50,5	2,9	68	458	15	6382
4	30	300	58	2,6	68	516	15	3860
4	35	150	20,5	4,3	58	263	15	3861
4	35	180	28	3,1	58	334	15	6383
4	35	210	35,5	2,5	58	405	15	3862
4	35	240	43	2,0	58	476	15	6384
4	35	270	50,5	1,7	58	547	15	3863
4	35	300	58	1,5	58	618	15	6385
5	30	180	18	23	127	224	20	3864
5	30	210	24	17	127	269	20	6386
5	30	240	30	14	127	314	20	3865
5	30	270	36	11	127	359	20	6387
5	30	300	42	9,7	127	404	20	3866
5	30	330	48	8,5	127	449	20	6388
5	35	180	18	13	107	247	20	6389
5	35	210	24	9,8	107	300	20	3867
5	35	240	30	7,9	107	352	20	6390
5	35	270	36	6,6	107	404	20	3868
5	35	300	42	5,6	107	457	20	6391
5	35	330	48	4,9	107	509	20	3869
5	40	180	18	8,3	98	274	20	3870
5	40	210	24	6,2	98	335	20	6392
5	40	240	30	5,0	98	397	20	3871
5	40	270	36	4,1	98	458	20	6393
5	40	300	42	3,5	98	519	20	3872
5	40	330	48	3,1	98	581	20	6394
6	36	210	16,5	30	171	257	24	3873
6	36	240	21,5	23	171	301	24	6395
6	36	270	26,5	18	171	345	24	3874
6	36	300	31,5	16	171	390	24	6396
6	36	330	36,5	13	171	434	24	3875
6	36	360	41,5	12	171	478	24	6397
6	42	210	16,5	17	147	281	24	6398
6	42	240	21,5	13	147	332	24	3876
6	42	270	26,5	11	147	384	24	6399
6	42	300	31,5	9,0	147	435	24	3877
6	42	330	36,5	7,8	147	487	24	6487
6	42	360	41,5	6,8	147	538	24	3878
6	50	210	16,5	9,4	127	320	24	3879
6	50	240	21,5	7,2	127	383	24	6401
6	50	270	26,5	5,8	127	446	24	3880
6	50	300	31,5	4,9	127	510	24	6402
6	50	330	36,5	4,2	127	573	24	3881
6	50	360	41,5	3,7	127	636	24	6403